

# ON DELAY TIMERS

DTR-XX FTR-08  
FTR-08M

**VTEKE**<sup>®</sup>


www.vteke.com.tr

TECHNICAL SPECS




PARAMETER	VALUE
Operating Voltage	150-260VAC; FTR-08M (12V-240VAC/DC)
Operating Frequency	50 / 60 Hz
Operating Power	<4VA
Operating Temperature	-20°C.....55°C
Weight	<90-120Gr
Contact	1NO+1NC; 5A/250VAC
Protection Class	IP20
Connection Type	Plug-in Terminal Connection
Cable Diameter	Max 2.5mm <sup>2</sup>
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter

CODING TABLE

CODE	FUNCTION	OP VOLTAGE
DTR-30	On Delay Timer 0.1sec - 30sec	150V – 260VAC
DTR-60	On Delay Timer 0.1sec - 60sec	150V – 260VAC
DTR-03M	On Delay Timer 0.1min - 3min	150V – 260VAC
FTR-08	On Delay Timer 0.1min - 100hr	150V – 260VAC
FTR-08M	On Delay Timer 0.1min - 100hr	12V - 240VAC/DC

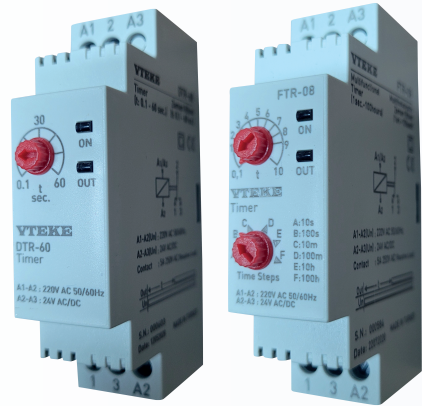

CONNECTION DIAGRAM

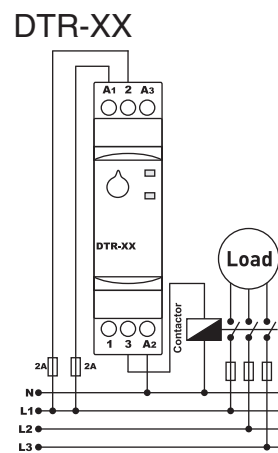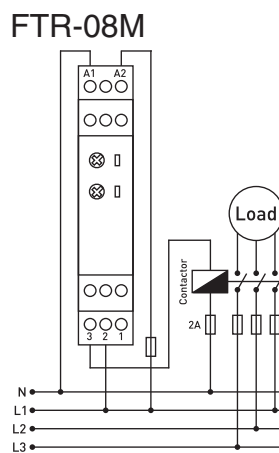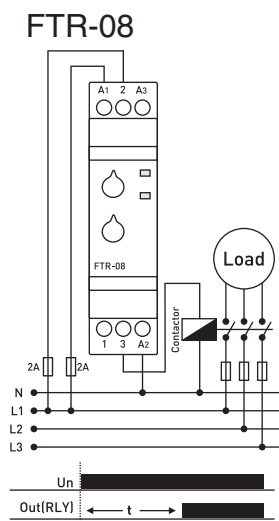

DIMENSIONS

