




NON INSULATED TERMINALS

ITEM NO	Wire Range	DIMENSIONS					
		L	Tolerance	d1	Tolerance	D1	D2
06-EN5006	0.50	6.0	±1.5	1.0	±0.14	1.3	1.8
06-EN5008		8.0					
06-EN5010		10.0					
06-EN7506	0.75	6.0	±1.5	1.2	±0.14	1.5	2.3
06-EN7508		8.0					
06-EN7510		10.0					
06-EN1006	1.00	6.0	±1.5	1.4	±0.14	1.7	2.5
06-EN1008		8.0					
06-EN1010		10.0					
06-EN1012		12.0					
06-EN1507	1.50	7.0	±1.5	1.7	±0.25	2.0	2.8
06-EN1508		8.0					
06-EN1510		10.0					
06-EN1512		12.0					
06-EN2507	2.50	7.0	±1.5	2.2	±0.25	2.5	3.4
06-EN2508		8.0					
06-EN2510		10.0					
06-EN2512		12.0					
06-EN4008	4.00	8.0	±1.5	2.8	±0.25	3.2	4.0
06-EN4009		9.0					
06-EN4010		10.0					
06-EN4012		12.0	±2				
06-EN4015		15.0					
06-EN4018		18.0					
06-EN6010	6.00	10.0	±1.5	3.5	±0.3	3.9	4.7

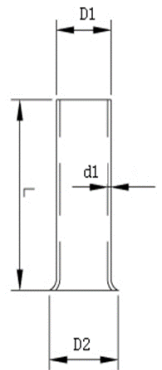

06-EN6012		12.0					
06-EN6015		15.0	±2				
06-EN6018		18.0					
06-EN10012	10.00	12.0	±2	4.5	±0.3	4.9	5.8
06-EN10015		15.0					
06-EN10018		18.0					
06-EN16012	16.00	12.0	±2	5.8	±0.3	6.2	7.5
06-EN16015		15.0					
06-EN16018		18.0					
06-EN25015	25.00	15.0	±2	7.3	±0.4	7.7	9.5
06-EN25016		16.0					
06-EN25018		18.0					
06-EN25022		22.0					
06-EN35016	35.00	16.0	±2	8.3	±0.4	8.7	10.5
06-EN35018		18.0					
06-EN35020		20.0					
06-EN35025		25.0					
06-EN50018	50.00	18.0	±2	10.3	±0.4	10.9	13.0
06-EN50020		20.0					
06-EN50025		25.0					

