

PILOT INDICATOR VOLTMETER & AMMETER [22mm]

VIL- SERIES

AIL- SERIES

VTEKE[®]


www.vteke.com.tr

FEATURES

High quality **Pilot Indicator LED** with clear glass. LED is designed to spread light equally on glass and tolerate high temperatures. Terminal side is colored with the same color as indicator light.

TECHNICAL DATA

PARAMETER	VALUE
Measured Voltage Range	20-500V
Measured Amper Range	0-100A
Frequency	50-60Hz for AC
IP Rating	IP20 body, IP55 Panel Side
Dielectric Strength	2.5kV VAC, 1-min, (Power Frequency Withstand Voltage) Insulation Resistance Ui: 60V is 5Mohm Ui: 60-660V is 50Mohm
Hole Diameter	22mm
Continuous Working Life	30,000hr

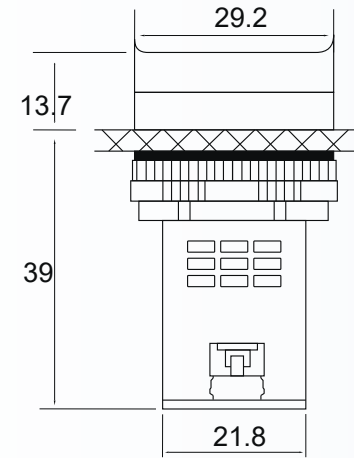

CODES

CODE	MEASURED	COLOR
VIL-22-G	Voltage	Green
VIL-22-R	Voltage	Red
VIL-22-A	Voltage	Yellow
VIL-22-B	Voltage	Blue
VIL-22-W	Voltage	White



CODE	MEASURED	COLOR
AIL-22-G	Voltage + Amper	Green
AIL-22-R	Voltage + Amper	Red
AIL-22-A	Voltage + Amper	Yellow
AIL-22-B	Voltage + Amper	Blue
AIL-22-W	Voltage + Amper	White

