

# DIGITAL OVERLOAD CONTACTOR

CON-XX

**VTEKE**<sup>®</sup>

www.vteke.com.tr


TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
Operating Voltage	100-240V AC
Operating Frequency	50 / 60 Hz
Operating Power	<10VA
Operating Temperature	-20°C - 55°C
Weight	<380Gr
High Current (Overload) Range	CON-12: 1A-12A CON-18: 1A-18A CON-25: 1A-25A
Asymmetry	%50 fixed (2sec fixed delay)
Waiting (t)	0.1sec – 10sec
Display	2 LEDs + 3 Displays
Contact	2NO+2NC; 3A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Control Max2.5mm <sup>2</sup> Power Max6mm <sup>2</sup>
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter

PHOTO



DIMENSIONS

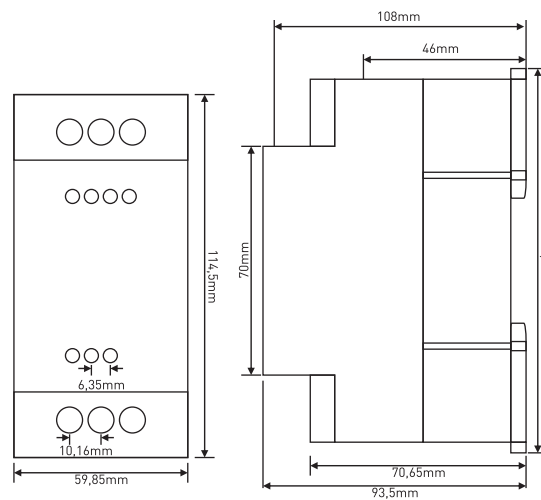

CONNECTION DIAGRAM

