

DIGITAL OVERLOAD CONTACTOR

CON-50

VTEKE[®]

www.vteke.com.tr


TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
Operating Voltage	120-240V AC
Operating Frequency	50 / 60 Hz
Operating Power	<10VA
Operating Temperature	-20°C - 55°C
Weight	<700Gr
High Current (Overload) Range	25A-50A
Asymmetry	%50 fixed (2sec fixed delay)
Waiting (t)	0.1sec – 20sec
Display	3 Displays
Contact	3NO+3NC; 3A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Control Max2.5mm ² Power Max95mm ²
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter

PHOTO



DIMENSIONS

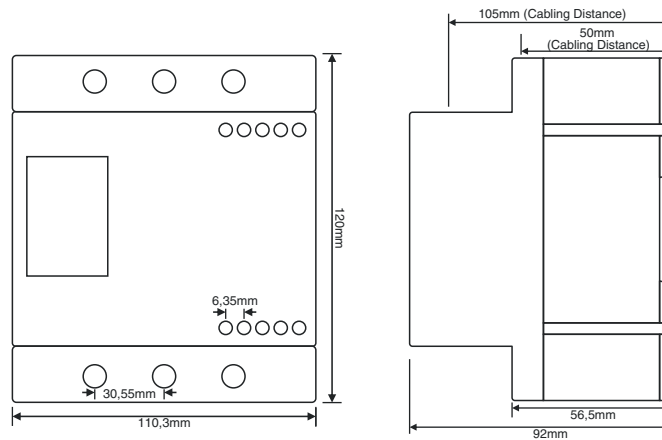

CONNECTION DIAGRAM

