

# DIGITAL OVERLOAD RELAY

DOR-50, DOR-100

**VTEKE**<sup>®</sup>  
www.vteke.com.tr


## TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
Operating Voltage	150-260V AC
Operating Frequency	50 / 60 Hz
Operating Power	<6VA
Operating Temperature	-20°C.....55°C
Weight	<250Gr
High Current (overload) rang	DOR-50: 15A-50A AC DOR-100: 40A-100A AC
Asymmetry	%50 fixed
Waiting (t)	0.1sec – 20sec
Display	5 LEDS + 3 Displays
Contact	1NO+1NC; 5A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Max2.5mm <sup>2</sup>
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter

## PHOTO



## DIMENSIONS

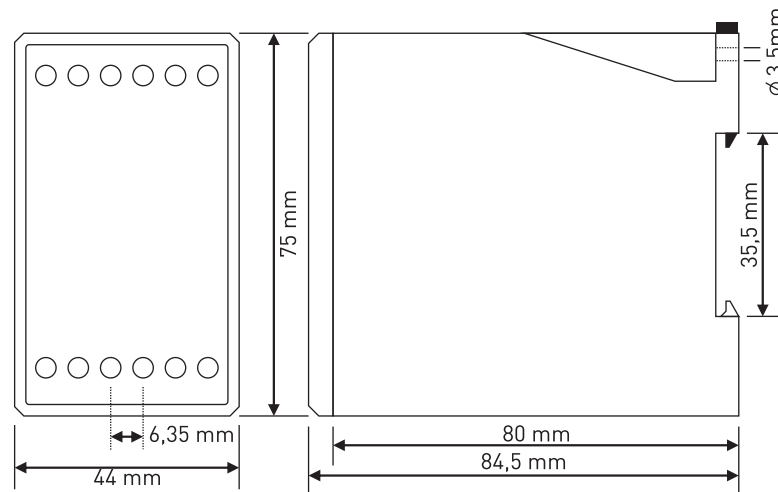

## CONNECTION DIAGRAM

