

# PHASE PROTECTION RELAY(3Ph+N)


PPR-14 PPR-14P

**VTEKE**<sup>®</sup>  
www.vteke.com.tr


## TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
Operating Voltage	3 X 380V AC
Operating Frequency	50 / 60 Hz
Operating Power	<6VA
Operating Temperature	-20°C.....55°C
Weight	<110Gr
Connection	3-Phase with N
Asymmetry Limit	%30 - Fixed
PTC	PPR-14, NO; PPR-14P, YES
Display	2 LEDS
Contact	1NO+1NC; 5A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Max1.5mm <sup>2</sup>
Mounting	DIN Rail Mounting
Working Altitude	<2000 mete

## PHOTO

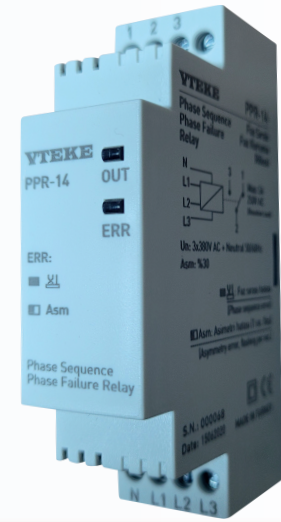

## DIMENSIONS

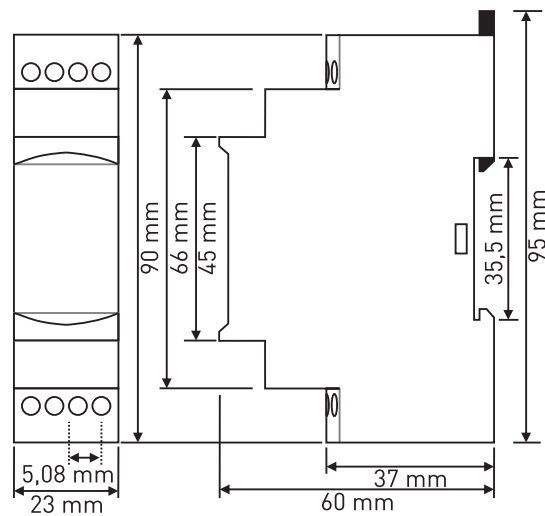

## CONNECTION DIAGRAM

